USED OB TRAILER - "Rack ready" 12G WIRED BUILT AS 12 CAMERA CHAINS OB TRAILER

Facts of the "Rack ready" OB Trailer:

The trailer was built by Humbaur and BFE in 2020 in Germany
First registration: 09/2024
MOT is valid until June 2026
2 axle Trailer
Very solid build
Detachable VBG75 mm standard hitch – adjustable in height

The Trailer is prepared for 12 camera channels
10 working positions
Compact production design
Electrical heating system
Daikin Air conditioning

Video wiring:

12G-SDI and 12G-BNC on all video cables - only long runs

Not included in the OB Trailer – on request

Video and Audio Mixers, Intercom System, VSM control system, Camera chains, Lenses, Tripods, EVS systems, Recording machines, camera cables etc.





<u>Short description of the OB Trailer – prepared for up to 10 camera chains:</u>

Compact production design used rack ready OB Trailer – prepared for 12 camera chains. OB Trailer has 10 working positions in total. This trailer is rack ready including power and aircon as well as pre wired cables to all working positions, monitors and speakers in 12G-SDI and 12G-BNC.

Technical specifications of the OB Trailer:

OB Trailer:

Rack ready OB Trailer

MOT certification of the Trailer valid until:

June 2026

First registration of the Trailer:

September 2024

Measurements Trailer:

Length: 8,60 m Width: 2,55 m Height: 3.50 m

Weight of trailer without mobile equipment:

approx. 6 Tons

Maximum weight:

10.500 kg

Possible weight on the axles:

4.750 kg on each axle

Working positions:

In total 10 working positions + tailboard.

3 working positions on the left side – vision control, 3 working positions on the right side - production gallery (slow-motion), 3 working positions in the front – production gallery and 1 working position in the back - audio gallery.

Power system:

63A 400V or 230V 3-phase (both, you may choose)

Compliant with IEC Power regulations

25m 400V 32A power cable

Hydraulic stamps:

Hydraulic stamps on front and rear side

Air condition System - Daikin:

2x Daikin Aircon

Sandwich frame construction of the Trailer:

Aluminium

Walkable roof and possibility to locate a camera on the roof:

No



Room concept OB Trailer:

Compact room design with production gallery, vision control and audio gallery.

Video cabling:

12G-SDI and 12G-BNC – only long-runs between different positions internally, not internal cables for specific racks

Intercom System:

Riedel Artist 64 x 64 with 11x RCP panels was installed – intercom system not included within the OB Trailer

Not included – available on request:

Video Mixer

Video Matrix

Audio Mixer

Intercom system

Camera chains

Camera cables

Lenses

Tripods

EVS servers

hy **Recording machines**

Camera cables

Audio equipment (microphones, audio cables etc.)

Pictures of the OB Trailer:


















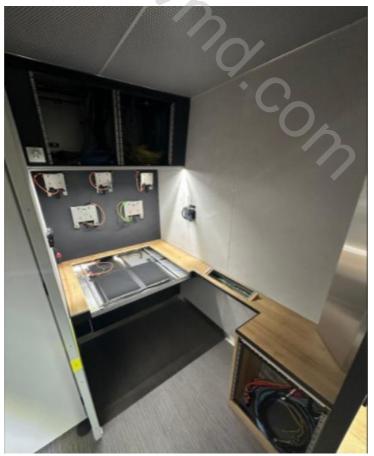

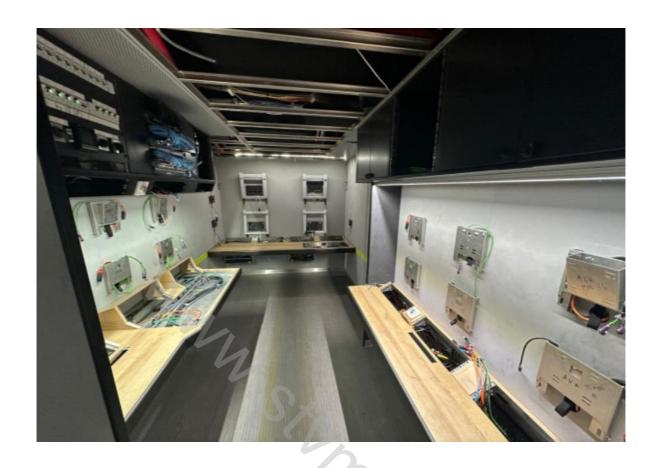




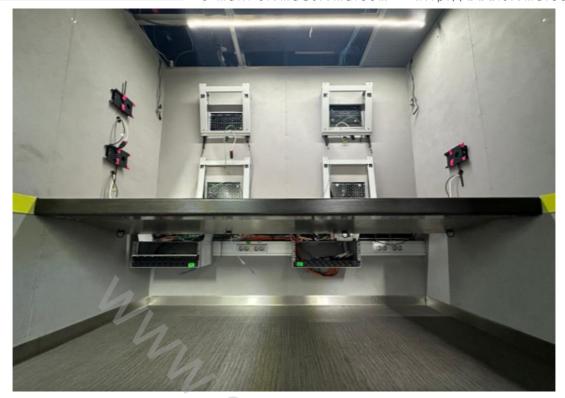



Power system:

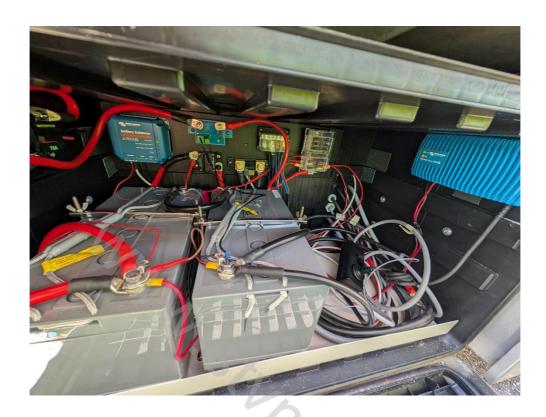



Hydraulic legs:









Paradeisergasse 9 • 9020 Klagenfurt, Austria Tel.: +43 463-90 8000 • Fax: +43 463-90 8000-99 e-mail: stvmd@stvmd.com • http://www.stvmd.com

Aircon:







Example pictures (3D Renderings) of equipped trailer:





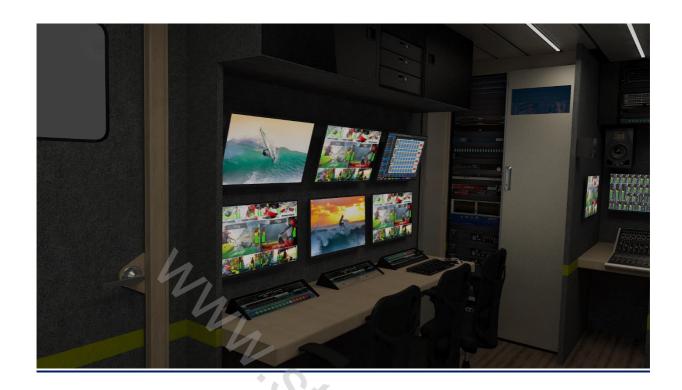





Technichal Drawings: and Layout



