

**FOR SALE**

**up to 6x used Riedel MediorNet Compact Frames in different versions  
(2x Basic, 3x Plus, 1x Pro)**

**B-Stock equipment**

**all equipment has been tested and serviced**

**built in 2012**

**2 years warranty**

**Immediately available**

**see all technical specifications of the available frames below**

**see photos of all frames at the end of the PDF**

**Specifications MediorNet Compact**

Features	MediorNet Compact BASIC	MediorNet Compact PLUS	MediorNet Compact PRO
Video In	2 x 3G/HD/SD-SDI	2 x 3G/HD/SD-SDI	4 x 3G/HD/SD-SDI
Video Out	2 x 3G/HD/SD-SDI	2 x 3G/HD/SD-SDI	4 x 3G/HD/SD-SDI
Slot for Option Boards	n/a	n/a	1 x
Option Boards			
MN-C-OPT-SDI-8I	n/a	n/a	8x Video In (3G/HD/SD-SDI)
MN-C-OPT-SDI-8O	n/a	n/a	8x Video Out (3G/HD/SD-SDI)*
MN-C-OPT-SDI-4I4O	n/a	n/a	4x In / 4x Out (3G/HD/SD-SDI)
DisplayPort Out	2x	2x	2x
AES3/EBU	2x	2x	4x
Audio In (analog)	2x	2x	4x
Audio Out (analog)	2x	2x	4x
RockNet-Interface	n/a	1x	1x
MADI (SFP)	1x	1x	2x
Ethernet	1x	1x	3x
GPI	n/a	n/a	10x GPI In / Out (individually switchable)
Serial (RS232, RS422, RS485)	1x	1x	2x
Sync In/Out	1x In / 1x Out	1x In / 1x Out	1x In / 3x Out

Overall	
Operating Temperature	0°C to +40°C (32°F to +104°F)
Power Requirements	100 - 240 VAC / 47 - 63 Hz 12 VDC ±10% (10.8 - 13.2 VDC)
Power Consumption	80 VA
Dimensions (H x W x D)	133 mm x 483 mm x 241 mm (3 RU x 19" x 9.5")
Weight	8.2 kg (18.1 lbs.)

\*4x 3G/HD/SD-SDI and 4x HD/SD-SDI

**Price on request:**

excl. VAT

Up to 6x Riedel MediorNet Compact Frames in different versions for sale

excl. shipping & insurance costs

excl. custom fees

**Please see all technical specifications of all available Mediornet versions below:**

**MediorNet Compact Basic – V1:**

- |    |         |   |
|----|---------|---|
| 1x | 1910022 | MN-Compact Basic<br>MediorNet 19"(3RU) frame incl. power supply and fan, 12 internal ports for fibre connections, 2 x SDI in , 2 x SDI out, 2 x Display Port<br>out, 1 x Madi optical, 2 x AES (RJ45), 1 x Ethernet, 2 x Mic/Line in, 2 x Line out, 1x Serial (RS232, RS422, RS485), 1 x Sync in, 1 x Sync<br>outMadi SFP transceiver and fiber link<br>ports not included<br>MN-C-OPT-   |
| 1x | 1950010 | QuadCON-WDM-9,6<br>WDM fiber connection kit Neutrik QuadCON complete incl. 6 x Single Mode SFP (1310nm / 1490nm /<br>1550nm) and 2 x WDM Mux/<br>Demux for 6 Mediornet High Speed links. Opt. budget 9,6dB, internally reconfigurable to 14,6dB. Distance to cover<br>depending on<br>attenuation of fiber used:9/125µm Singlemode-Fiber up to 10km (6.214mi), internally reconfigurable to<br>40km (24.856mi)<br>MN-C-OPT-LC-SM- |
| 1x | 1950020 | 1310-9,6<br>Fiber connection kit 2 x LC Duplex complete incl. 2 x 1310nm Single Mode SFP, optical budget 9.6 dB, max.<br>Distance to cover<br>depending on attenuation of fiber used:9/125µm<br>Singlemode-Fiber up to 10km (6.214mi)<br>MN-C-OPT-LC-MM-  |
| 2x | D_00001 | 850-5<br>Fiber connection kit 2 x LC Duplex complete incl. 2 x 850nm Multi Mode SFP, optical budget 5dB, max. Distance to cover<br>depending on<br>attenuation of fiber used: 50/125µm Multimode-<br>Fiber up to: 150m (500ft)  |

**MediorNet Compact Basic – V2:**

- 1x 1910022 MN-Compact Basic  
MediorNet 19"(3RU) frame incl. power supply and fan, 12 internal ports for fibre connections, 2 x SDI in , 2 x SDI out, 2 x Display Port  
out, 1 x Madi optical, 2 x AES (RJ45), 1 x Ethernet, 2 x Mic/Line in, 2 x Line out, 1x Serial (RS232, RS422, RS485), 1 x Sync in, 1 x Sync  
outMadi SFP transceiver and fiber link ports not  
included  
MN-C-OPT-QuadCON-
- 2x 1950010 WDM-9,6  
WDM fiber connection kit Neutrik QuadCON complete incl. 6 x Single Mode SFP (1310nm / 1490nm / 1550nm) and 2 x WDM  
Mux/  
Demux for 6 MediorNet High Speed links. Opt. budget 9,6dB, internally reconfigurable to 14,6dB. Distance to cover depending  
on  
attenuation of fiber used:9/125µm Singlemode-Fiber up to 10km (6.214mi), internally reconfigurable to 40km (24.856mi)

**MediorNet Compact Plus – V1:**

- 1x 19103 MN-Compact Plus  
MediorNet 19" (3RU) frameincl. power supply and fan, 12 internal ports  
for fibre connections,2 x SDI in , 2 x SDI out, 2 x Display Port  
out, RockNet audio network port, 1 x Madi optical, 2 x AES (RJ45), 1 x  
Ethernet, 2 x Mic/Line in, 2 x Line out, 1x Serial (RS232, RS422,  
RS485), 1 x Sync in, 1 x Sync outMadi SFP  
transceiver and fiber link ports not included  
MN-C-OPT-
- 1x 19500 QuadCON-WDM 9,6  
WDM fiber connection kit Neutrik QuadCON complete incl. 6 x Single Mode SFP  
(1310nm / 1490nm / 1550nm) and 2 x WDM Mux/  
Demux for 6 MediorNet High Speed links. Opt. budget 9,6dB, internally reconfigurable to  
14,6dB. Distance to cover depending on  
attenuation of fiber used:9/125µm Singlemode-Fiber up to 10km (6.214mi), internally  
reconfigurable to 40km (24.856mi)
- 1x 1950020 MN-C-OPT-LC-SM-1310-9,6  
Fiber connection kit 2 x LC Duplex complete incl. 2 x 1310nm Single Mode SFP, optical  
budget 9.6 dB, max. Distance to cover  
depending on attenuation of fiber used:9/125µm Singlemode-  
Fiber up to 10km (6.214mi)
- 2x D\_0001 MN-C-OPT-LC-MM-850-5

**MediorNet Compact Plus – V2:**

- 1x 1913 MN-Compact Plus  
 MediorNet 19" (3RU) frameincl. power supply and fan, 12 internal ports for fibre connections, 2 x SDI in , 2 x SDI out, 2 x Display Port out, RockNet audio network port, 1 x Madi optical, 2 x AES (RJ45), 1 x Ethernet, 2 x Mic/Line in, 2 x Line out, 1x Serial (RS232, RS422, RS485), 1 x Sync in, 1 x Sync out Madi SFP transceiver and fiber link ports not included
- 2x 1950 MN-C-OPT-QuadCON-WDM-9,6  
 WDM fiber connection kit Neutrik QuadCON complete incl. 6 x Single Mode SFP (1310nm / 1490nm / 1550nm) and 2 x WDM Mux Demux for 6 Mediornet High Speed links. Opt. budget 9,6dB, internally reconfigurable to 14,6dB. Distance to cover depending on

**MediorNet Compact Plus – V3:**


- 1x 191003 MN-Compact Plus  
 MediorNet 19" (3RU) frameincl. power supply and fan, 12 internal ports for fibre connections, 2 x SDI in , 2 x SDI out, 2 x Display Port out, RockNet audio network port, 1 x Madi optical, 2 x AES (RJ45), 1 x Ethernet, 2 x Mic/Line in, 2 x Line out, 1x Serial (RS232, RS422, RS485), 1 x Sync in, 1 x Sync out Madi SFP transceiver and fiber link ports not included
- 6x 195000 MN-C-OPT-LC-SM-1310-9,6  
 Fiber connection kit 2 x LC Duplex complete incl. 2 x 1310nm Single Mode SFP, optical budget 9.6 dB, max. Distance to cover depending on attenuation of fiber used: 9/125µm Singlemode-Fiber up to 10km (6.214mi)

**Mediornet Compact Pro – V1:**

- 1x 1910024 MN-Compact Pro  
 MediorNet 19" (3RU) frameincl. power supply and fan, 12 internal ports for fibre connections, 4 x SDI in, 4 x SDI out, 2 x Display Port out, RockNet audio network port, 2 x Madi optical, 4 x AES (RJ45), 3 x Ethernet, 4 x Mic/Line in, 4 x Line out, 2x Serial (RS232, RS422, RS485), 10 x GPI in or out, individually switchable, 1 x Sync in, 3 x Sync out. Madi SFP transceiver and fiber link ports not included
- 1x 1950010 MN-C-OPT-QuadCON- WDM-9,6  
 WDM fiber connection kit Neutrik QuadCON complete incl. 6 x Single Mode SFP (1310nm / 1490nm / 1550nm) and 2 x WDM Mux/ Demux for 6 Mediornet High Speed links. Opt. budget 9,6dB, internally reconfigurable to 14,6dB. Distance to cover depending on attenuation of fiber used: 9/125µm Singlemode-Fiber up to 10km (6.214mi), internally reconfigurable to 40km (24.856mi)
- 1x 1950020 MN-C-OPT-LC-SM-1310-9,6  
 Fiber connection kit 2 x LC Duplex complete incl. 2 x 1310nm Single Mode SFP, optical budget 9.6 dB, max. Distance to cover depending on attenuation of fiber used: 9/125µm Singlemode-Fiber up to 10km (6.214mi)
- 2x D\_000001 MN-C-OPT-LC-MM-850-5




Photos of the Equipment:

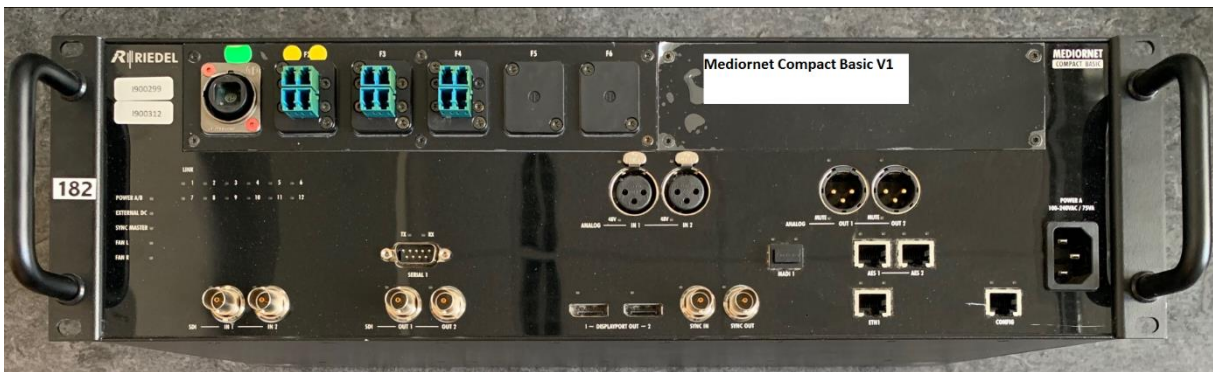

Up to 6x Riedel Mediornet Compact Frames in different versions for sale

# sports tv media distribution

Paradeisergasse 9 • 9020 Klagenfurt, Austria  
Tel.: +43 463-90 8000 • Fax: +43 463-90 8000-99  
e-mail: stvmd@stvmd.com • <http://www.stvmd.com>

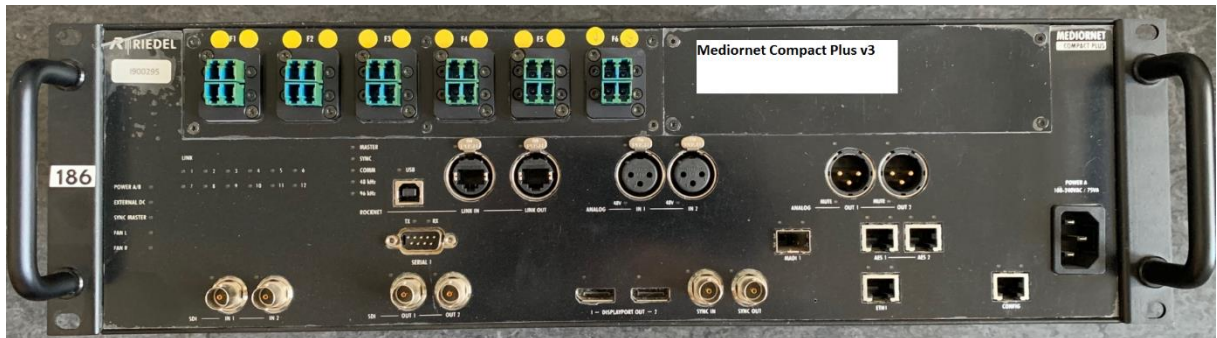

Up to 6x Riedel Medionet Compact Frames in different versions for sale