

FOR SALE

Used SlomoTV System Dominator AT-3G

Including 2x Controllers

With 1x Controller: 6x Channels IN / 2x Channels OUT controllable

With 2x Controllers: Each 4x Channels IN / 2x Channels OUT controllable

Up to 14x Channels recording in 3G 1080-50p possible

Please see pictures and technical specifications below

Great condition – built in 2018



Options

Option	Description	Fulcrum AT/12G	Fulcrum ATM/12G	Dominator AT/3G	Dominator AT/12G	BlackJack AT/4K
Transfer	Ability to transfer any clip or playlist to network integrated servers with the same option	Included	Included	Included	Included	Included
Game Analyzer	Telestrator for imposition of graphical elements (line, arrow, curved arrow, circle, etc.) and free hand drawing on live video. Best with Wacom Cintiq tablet (not included)	Included	Included	Included	Included	Included
DMR™ (Direct Movie Record)	Multi-Channel Recording direct in NLE native file formats (DVCPRO HD codec)	Included	Included	Included	Included	Included
Support of 4K	Allows working with 4K video in Replay and Recording mode	✓ 4 Rec + 4 Search + 2 Play + FX	✓ 4 Rec + 4 Search + 2 Play + FX	✗	✓ 6 Rec + 6 Search + 2 Play + FX	✓ 4 Rec + 4 Search + 2 Play + FX
Multipack codecs	Supports of: Apple ProRes; AVID DNxHD™; XDCAM422 50Mbit; AVC-Intra 100; XAVC; AVC-Intra 50	✓	✓	✓	✓	✓
XAVC 4K hardware codec	Supports: AVC-Intra 100; XAVC; AVC-Intra 50 for all resolutions (4K/HD/SD)	✓	✓	✓	✓	✗
Additional Replay Workplace	Each additional replay operator's work place for 3G/HD mode, including remote controller	✗	✓ 1	✓ 1	✓ 1	✓ Up to 3
SSD Storage Expansion*	Built-in storage expansion to 532 hrs. of 100 Mbit HD video	✓	✓	✓	✓	✓
Fibre Channel*	Hardware option for connection to FC RAID/SAN. Provides high speed (16Gbit) reliable integration with external file storage. Available for any Level 16G SAN compatible system	✓	✓	✓	✓	✓

Option	Description	Fulcrum AT/12G	Fulcrum ATM/12G	Dominator AT/3G	Dominator AT/12G	BlackJack AT/4K
Super Motion	Support for 2x, 3x, 4x Super Slow Motion HD Camera	✓	✓	✓	✓	✓
Xtra Motion	Support for 6x GVG LDX-86 HS/XS and Panasonic AK-HC5000 GVG 4X (200P) cameras	✓	✓	✓	✓	✓
HyperMotion	Support for 1000FPS Ikegami HiMotion-II camera (Requires from 1 to 3 dedicated SDI inputs). Includes Special HiMotion-II camera Remote cable	✓	✓	✓	✓	✓
Export	MXF/QT Export of recorded material in native Apple Final Cut and Avid MC files with DVCPRO / ProRes / AVID DNxHD™/ XDCAM422 50Mbit / AVC-Intra 100 / XAVC / AVC-Intra 50 codecs	✓	✓	✓	✓	✓
VideoServer	Fixed time delay (~3-25 sec.) of Program/Out used in Live Broadcasts	✓	✓	✓	✓	✓
ACADEMY 8	Software option for servers with up to 8 HD/SD recording channels. Creates a video control room simulator by providing emulation of multiple synchronized inputs. Used for individual and team training of operators and directors	✓	✓	✓	✓	✓
ACADEMY 16	Software option for creating a video control room simulator for individual and team training of operators and directors. Supports 2 servers with emulation of up to 16 "live" cameras in HD and SD resolution. Includes support of specialized control console	✗	✗	✓	✓	✓

Option	Description	Fulcrum AT/12G	Fulcrum ATM/12G	Dominator AT/3G	Dominator AT/12G	BlackJack AT/4K
CARRYING CASE	Protective carrying case. Assures convenient, easy handling of all system components	✓	✓	✓	✓	✓
External equipment						
DMR™ Station 8	External hot-swappable toolless/trayless 8-bay rack for standard 3.5" SATA hard drives suitable for DMR™ recording. Includes PCI-Ex8 Adapter and 2 meter connection cable. Transfer speed: up to 1Gbytes/sec	✓	✓	✓	✓	✓
DMR™ Station 12	External hot-swappable toolless/trayless 12-bay rack for standard 3.5" SATA hard drives suitable for DMR™ recording (video recording direct into native NLE file formats). Includes PCI-Ex8 Adapter and 2 meter connection cable. Transfer speed: up to 1.5 Gbytes/sec	✓	✓	✓	✓	✓

Note:

* – Available at ordering

Technical Characteristics 4U servers Comparison table

Parameters	Fulcrum AT/12G	Fulcrum ATM/12G	Dominator AT/3G	Dominator AT/12G	BlackJack AT/4K	
Video inputs SDI (Replay Mode / Recording for NLE)						
12G*	4 / 6 (DMR™ – 3 channels, export – 6 channels)	4 / 6 (DMR™ – 3 channels, export – 6 channels)	–	6/6	3* / 4* (Quad 3G SDI Connection)	
3G	7 / 8	11 / 12	14 / 10	14 / 10	20 / 10	
HD/1280p/SD	7 / 8	11 / 12	14 / 16	14 / 16	20 / 24	
Video outputs SDI (Replay Mode)						
3G/HD/1280p/SD	2	2	2	2	4	
12G*	2	2	–	2	2 (Quad 3G SDI Connection)	
1st Out – Payout with transition effects between clips. 2nd Out can be configured as Preview, Multiviewer, Alpha-channel, Game Analyzer or Delay Output*.						
Graphics ports	4 DP					
Video Formats						
HD/SD	29.97Hz/59.94Hz: 1920x1080/59.94i, 1920x1080/29.97 PsF, 1280x720/59.94p, 720x480/29.97 PsF, 720x480/59.94i 25Hz/50Hz: 1920x1080/50i, 1920x1080/25 PsF, 1280x720/50p, 720x576/25 PsF, 720x576/50i Support of 16:9 and 4:3 modes.					
3G	1920x1080/59.94p, 1920x1080/119.88i 1920x1080/50p, 1920x1080/100i					
4K	UHD (3840x2160) 25p/30p/50p/60p					
Operational channels (simultaneously)						
Replay Mode	12G SDI	4 Record 4 Search 2 Playback + FX	4 Record 4 Search 2 Playback + FX	–	6 Record 6 Search 2 Playback + FX	(Quad 3G SDI Connection): 4 Record 4 Search 2 Playback + FX
	3G/HD/SD SDI	Up to 7 Record 7 Search 2 Playback + FX	Up to 11 Record 11 Search 2 Playback + FX	Up to 14 Record 14 Search 2 Playback + FX	Up to 14 Record 14 Search 2 Playback + FX	Up to 20 Record 20 Search 8 Playback + FX

Parameters		Fulcrum AT/12G	Fulcrum ATM/12G	Dominator AT/3G	Dominator AT/12G	BlackJack AT/4K
Recording for NLE	12G SDI	Up to 4	Up to 4	–	Up to 6	Up to 6
	3G**/HD/SD SDI	Up to 8	Up to 12	Up to 16	Up to 16	Up to 24
Codecs						
Replay	3G / HD / SD	DCT based I-Frame; ProRes; AVID DNxHD; DVCPro HD; DVCPro 50; IMX; XDCAM 50; AVC-Intra 100/XAVC				
	12G (4K)	DCT based I-Frame 1200Mbit				
DMR™	3G / HD / SD	ProRes; AVID DNxHD; DVCPro HD; DVCPro 50; IMX; XDCAM 50; AVC-Intra 100/XAVC				
	4K	ProRes 422				
Export	3G / HD / SD	MJPEG; ProRes; AVID DNxHD; IMX; XDCAM 50; MPEG2 Long GOP; H.264; MPEG4; DVCPro 50 / DVCPro HD; AVC-Intra 100/XAVC; v.210*				
	4K	ProRes 4444, RAW UNCOMPRESSED*; 4K ProRes				
Export Containers		QuickTime / MXF / MP4				
Storage (SSD)		266 hrs. HD video 100 Mbit/s	266 hrs. HD video 100 Mbit/s	133 hrs. HD video 100 Mbit/s	266 hrs. HD video 100 Mbit/s	266 hrs. HD video 100 Mbit/s
Multiviewer		Built-in into main interface – up to 9 video windows; For 3G / HD / SD only: Separate on second graphics or SDI output –up to 16 video-windows; As one of MultiSkin modes.	Built-in into main interface – up to 13 video windows; For 3G / HD / SD only: Separate on second graphics or SDI output –up to 24 video-windows; As one of MultiSkin modes.	Built-in into main interface – up to 16 video windows; For 3G / HD / SD only: Separate on second graphics or SDI output –up to 30 video-windows; As one of MultiSkin modes.	Built-in into main interface – up to 16 video windows; For 3G / HD / SD only: Separate on second graphics or SDI output –up to 30 video-windows; As one of MultiSkin modes.	Built-in into main interface – up to 22 video windows; For 3G / HD / SD only: Separate on second graphics or SDI output –up to 42 video-windows; As one of MultiSkin modes.
Recorded Audio Channels*** (Replay Mode / Recording for NLE)		Up to 56 / 64 16 / 24 bit 48 kHz	Up to 88 / 96 16 / 24 bit 48 kHz	Up to 112 / 128 16 / 24 bit 48 kHz	Up to 112 / 128 16 / 24 bit 48 kHz	Up to 160 / 192 16 / 24 bit 48 kHz
Replay Audio Channels		8 audio channels embedded into SDI video output signal				

Parameters	Fulcrum AT/12G	Fulcrum ATM/12G	Dominator AT/3G	Dominator AT/12G	BlackJack AT/4K
Controller	Specialized console Control ZR with push-buttons, T-Bar and Jog/Shuttle (via RS-422 / RS-232* / USB* / Ethernet* interface).				
Time-code	LTC (SMPTE 12M-1) Support of Drop Frame and Non-Drop Frame for 29.97/59.94 modes				
Synchronization	Support of BlackBurst and Tri-Level signals				
GPIO	2 inputs and 2 outputs for integration with external equipment (Mixer, Switcher, Automation)				
Video Standards SDI	HD video – SMPTE 292M, SMPTE 274M; SD video – SMPTE 259M; 720p video – SMPTE 296M 2001 3G video – SMPTE 424M / SMPTE 425M; 4K video – SMPTE ST-2081 / SMPTE ST-2082				
Video Exchange	10 GbE (Network); USB 3.0/eSATA (External HDD Box) Built-in trayless/toolless 3.5" SATA HDD Rack				
DMR™ RACK	4	4	8	8	8
Replay workplaces (operators)	1	1+1*	1+1*	1+1*	1+3*
Power	110V/60Hz or 220V/50Hz				
Power Consumption	500 W				
Chassis	4U, 19"				
Dimensions mm (H W D)	176.5 x 483 x 560 (with redundant PS)				
Weight kg	20				


Notes:

* – optional;

** – depends on the codec used;

*** – embedded.

Dominator AT/3G

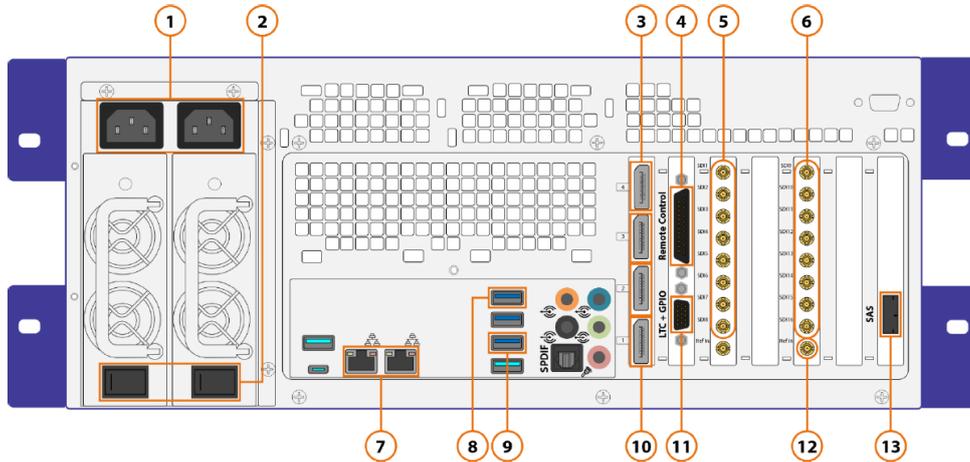


- 1 – Power AC 110/220V 60/50Hz;
- 2 – Power ON/OFF switches;
- 3 – Main Monitor – for Main Interface / Multiviewer (DisplayPort);
- 4 – Remote Control (DB-25);
- 5 – SDI video Inputs/Outputs 1...8 (DIN1.0/2.3);
- 6 – SDI video Inputs/Outputs 9...16 (DIN1.0/2.3);
- 7 – 10 GbE Network – for additional replay workplaces* – Remote Control via LAN (RJ-45 Ports);

- 8 – Mouse (USB Port);
- 9 – Keyboard (USB Port);
- 10 – Additional Monitor – for Multiviewer / Game Analyzer / Preview (Display Port);
- 11 – LTC + GPIO – Linear Time code Input / GPIO (DHS-15);
- 12 – Ref In – Synchronization (DIN1.0/2.3);
- 13 – SAS.

* – optional

Pictures of the Equipment:

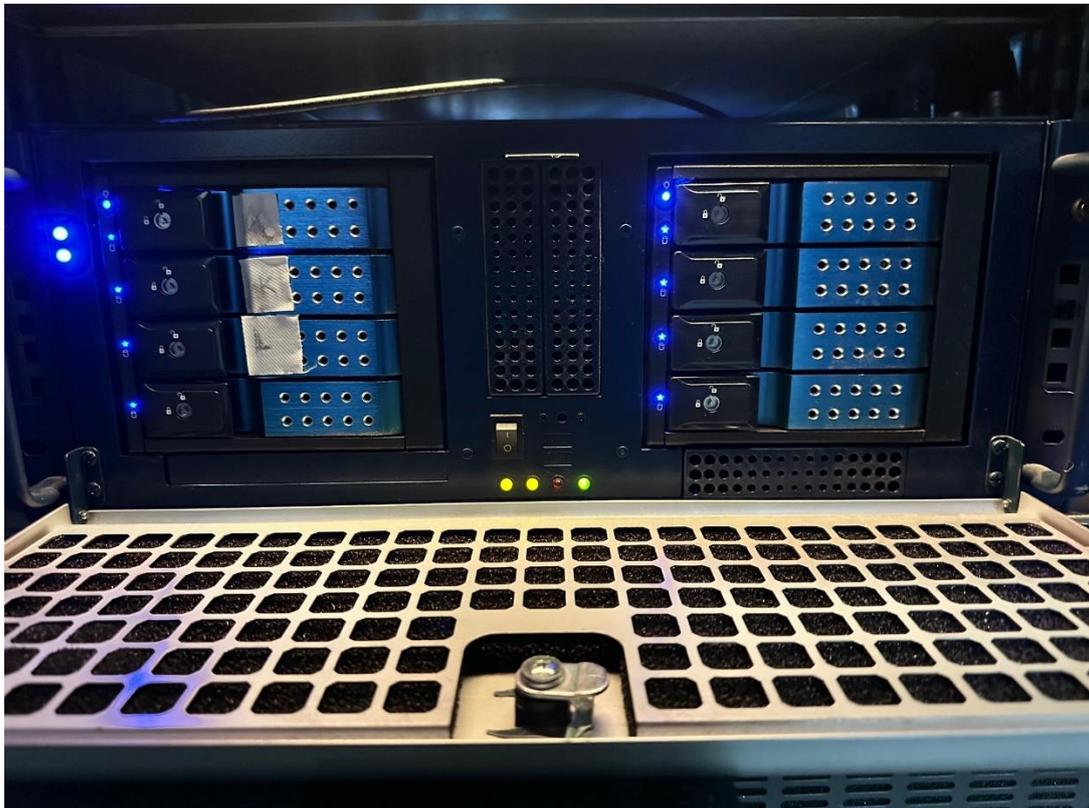

sports tv media distribution

Paradeisergasse 9 • 9020 Klagenfurt, Austria
Tel.: +43 463-90 8000 • Fax: +43 463-90 8000-99
e-mail: stvmd@stvmd.com • <http://www.stvmd.com>



Used SlomoTV System Dominator AT-3G

sports tv media
distribution

Paradeisergasse 9 • 9020 Klagenfurt, Austria
Tel.: +43 463-90 8000 • Fax: +43 463-90 8000-99
e-mail: stvmd@stvmd.com • <http://www.stvmd.com>

Price on request:

Excl. VAT

Excl. shipping & insurance costs

Excl. custom fees

For further information please contact:

sports tv media
distribution

Otmar Valzachi
sports tv media distribution GmbH

Paradeisergasse 9
9020 Klagenfurt

AUSTRIA

Tel:+43 463 908000
Fax:+43 463 908000 99
Mobile:+43 676 848606211
email: ov@stvmd.com
<http://www.stvmd.com>